

KYTOLA® Alarm Amplifier Model NK is designed for use with inductive proximity sensors according to NAMUR norm (EN 60947).

The alarm amplifier has a common relay output, which is activated if one or more sensors connected to NK cause alarm.



ALARM AMPLIFIER NK

- Function indicator LEDs on the enclosure cover
- Common group alarm
- Inputs for 1–30 NAMUR sensors, depending upon model

FEATURES

Protection class IP 54

Potential free change-over switch

TYPICAL APPLICATIONS


Indication of low flow alarm in oil lubrication systems

Indication of low or high flow alarm in sealing and cooling water systems

Gas flow alarm

Supply voltage	24 VDC, 110 VAC, or 220 VAC depending on model		
Inputs	For sensors according to NAMUR norm (EN 60947)		
Output	One common potential-free NO/NC change-over switch, 230 VAC, 5 A		
Protection class	IP54		
Function indicator LEDs	Green: System OK (no alarms) Red: Alarm (one or more sensors alarm)		
Dimensions (H x L x W)	NK-2	5.125 x 5.125 x 2.95	(130 x 130 x 75 mm)
	NK-12	7.125 x 7.125 x 2.95	(180 x 180 x 75 mm)
	NK-30	7.125 x 10.125 x 2.95	(180 x 255 x 75 mm)

NK-	■	/	■
Inputs for x sensors (2, 12 or 30)	x		
Supply voltage			
24 VDC	24-DC		
110 VAC	110		
220 VAC	220		

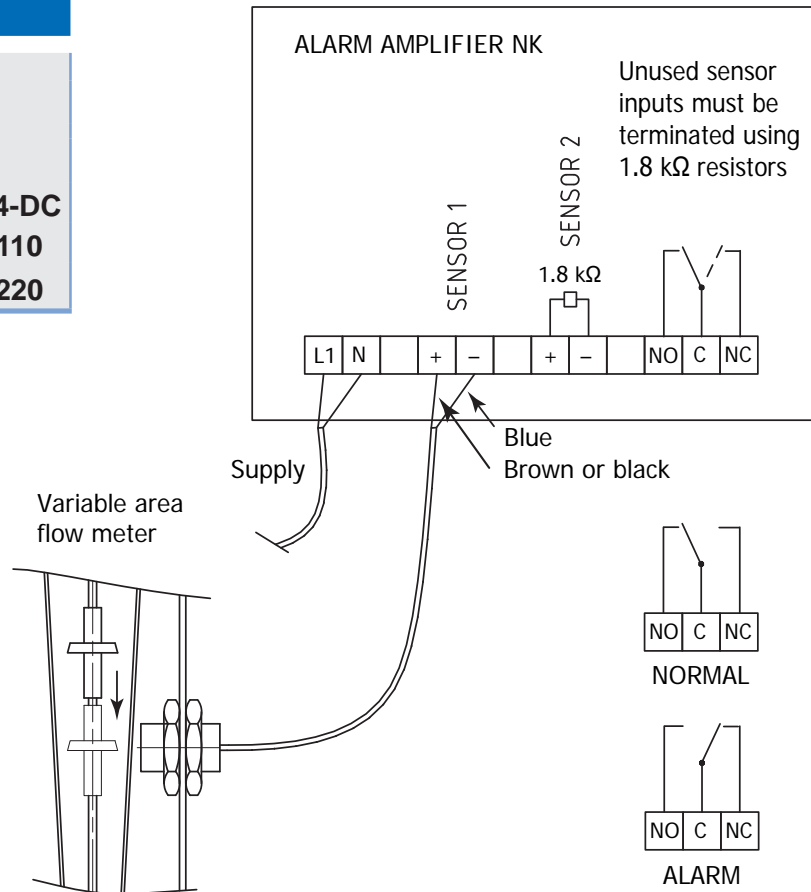

Copyright © Kytola Instruments Oy 2021. Dimensions and measurements are given within normal tolerances. Manufacturer reserves the right to changes without prior notification. Published 5/2021.