


For asbestos air sampling
on renovation sites

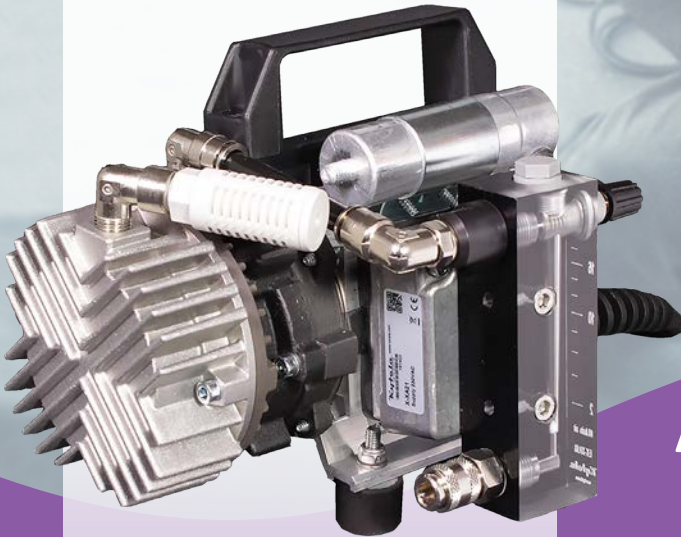

NEW

AIR SAMPLING DEVICE FOR ASBESTOS

- On-site air sampling device for asbestos
- Easy to use: plug and use
- Procedure in accordance with approved air sampling practice
- Delivered calibrated and ready to use
- Reliable and accurate sampling with proven Kytola flow meters

FEATURES

Vacuum pump

Flow meter with flow adjustment valve

Compatible hose with quick connector

Electric-driven, 230 VAC

One flow point measuring

Two flow points measuring available as option

Timer

Fixed, programmable timer switch available as option

TYPICAL APPLICATIONS

Measuring asbestos content on renovation sites using air sampling

Model	X-XA21
Flow range air	2 – 18 NL/min
Power supply	230 VAC (*120 VAC)
Ambient temperature	0...+40°C
Connections	Quick hose connection, hose inner Ø 8 mm, length 1.8 m**
Weight	6.2 kg incl. pump, flow meters

*On special request

**NOTE: To choose the correct sampling filter type, consult your sample analyzing lab. Filters are not included in Kytola delivery.

X-XA21- [] - [] []	
Number of measuring points	
1	1
2 (optional)	2
Supply voltage	
120 VAC	1
230 VAC	2
Flow Range	
2 – 18 NL/min	R
5 – 40 SCFH	V

