


The KYTOLA® variable area flow meter Model TL is a sturdy industrial flow meter.

It has a stainless steel AISI 316 or aluminium body with a heavy-duty impact resistant polymer flow tube.

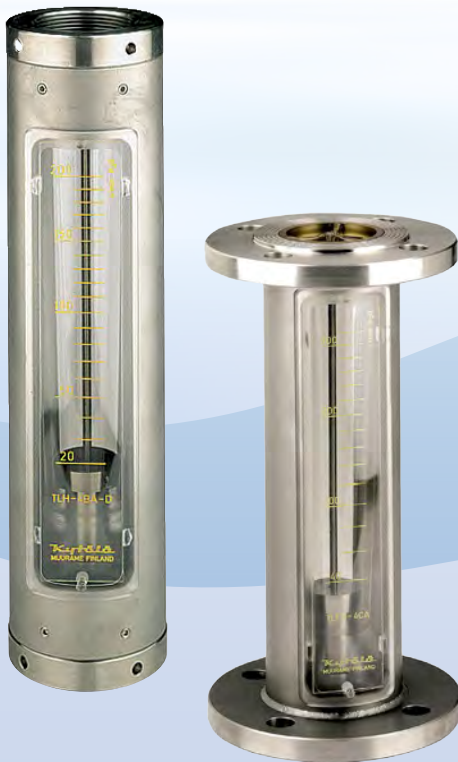

- Scales up to
50 – 400 L/min (H₂O)
1 – 12 m³/min (air)
- Scales for alternative gases and liquids
- Several connection choices
- Alarm-ready

ISO 9001:2008 ISO 14001:2004

FLOW METER TL

FEATURES

- Sturdy construction
- Protected flow tube

TYPICAL APPLICATIONS

- Sealing water measurement for vacuum pumps
- Lubrication oil measurement for gear boxes
- Flush water applications
- Gas flow measurements
- Power plants

OPTIONS

- Low and high flow alarm
- PES flow tube
- Viton® or EPDM seals

Model	TLA	TLH	TLFH
Connectors	NPT 2" / BSP 2"	NPT 2" / BSP 2"	DN 50 / ANSI 2"
Max. pressure	290 psi (20 bar)	290 psi (20 bar)	232 psi (16 bar)
Max. temperature	175°F (80°C), *248°F (120°C)	175°F (80°C), *248°F (120°C)	175°F (80°C), *248°F (120°C)
Weight	7.3 lbs (3.3 kg)	9.9 lbs (4.5 kg)	15 lbs (6.6 kg)
Connectors	Aluminium	AISI 316	AISI 316
Body	AISI 316		
Flow tube	Grilamid (PA-12) (*PES)		
Float	AISI 329 or PTFE (depending on range)		
Seals	Nitrile (*Viton®, EPDM)		
Accuracy	±5% F.S. (H ₂ O, +70°F (20°C))		


*) Special construction on request

Connections		Body Material		
BSP 2"	Aluminium (not for H ₂ O)	A		
BSP 2"	AISI 316	H		
DN 50/ANSI 2"	AISI 316	FH		

Flow Range H ₂ O		Flow Range Air		
USGPM	L/min	SCFM	Nm ³ /min	
2.0–15.0	7.5–55	15 – 70	0.3–1.9	4E*
2.5–27.5	10–105	20 – 120	0.4–3.0	4A
2.5–40.0	10–150	20 – 160	0.5–4.25	4F
5.0–52.5	20–200	20 – 220	0.5–6.0	4B
7.5–85	40–320	40 – 380	1–10	4C
7.5–105.0	50–400	50 – 450	1–12	4D

Scale		
H ₂ O L/min at +20°C		A
Relative scale 1–10		D
H ₂ O USGPM +70°F		G
Air Nm ³ /min at +20°C/1.013 bar (abs)		S
Air SCFM +70°F, 14.7 psia		T

Special Feature		
Alarm readiness (holder required)		D
NPT 2" or ANSI 2" 150 lbs connections		N
Grilamid flow tube, nitrile seals	blank	
PES flow tube, nitrile seals		V
PES flow tube, Viton® seals		W
Grilamid flow tube, Viton® seals		X
EPDM seals		Y

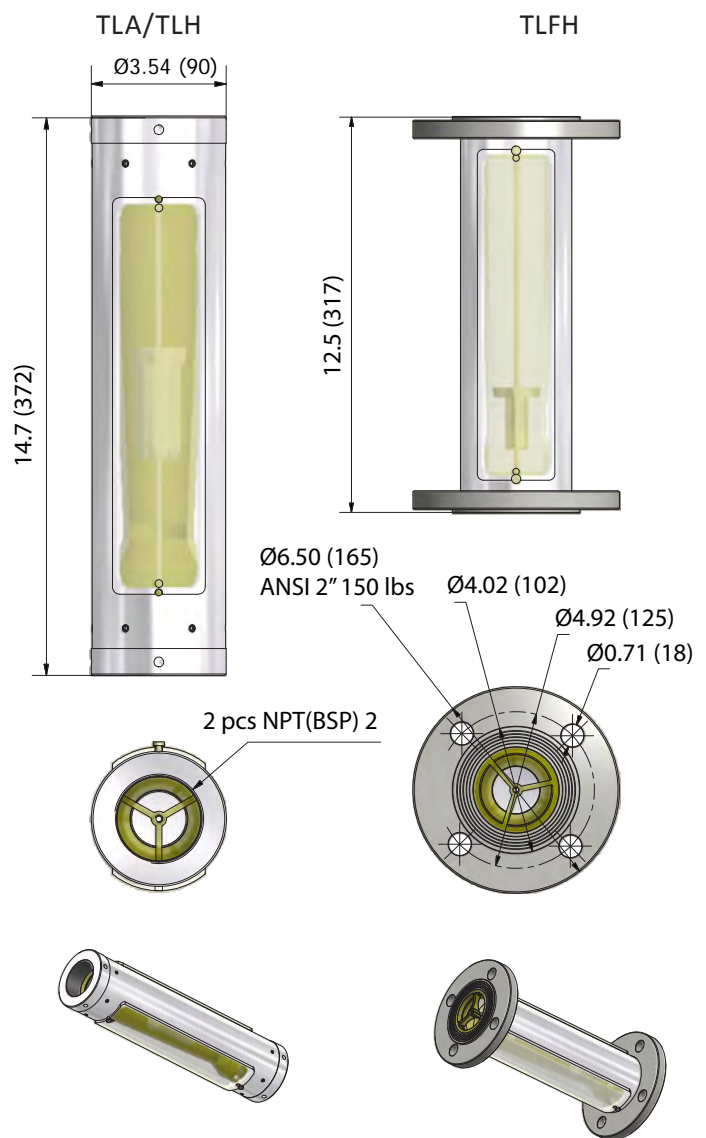

* = PTFE float, flow alarm not available

Standard feature: leave blank
 Special feature: choose a Character

NOTE: Measurements in the drawings in this datasheet are in inches (and millimeters) if not stated otherwise.



www.kytola.ca



Kytola Instruments Inc.
 900 Old Roswell Lakes Parkway, Suite 120
 Roswell, GA 30076, USA
 Tel: +1 678 701 3569
 Fax: +1 514 448 5151
 E-mail: flow@kytola.ca